


## Stainless steel ball plunger with screwdriver notching

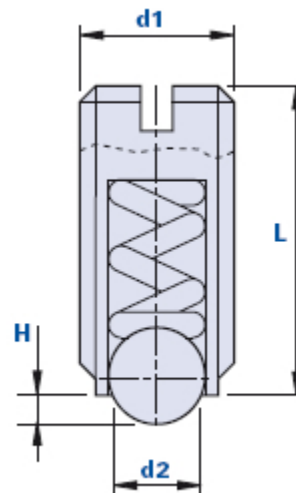

Code	Description	Dimensions				Spring pressure		Weight grams	Stock
		d1	L	d2	H	Preload N.	Max load N.		
01GRZX	GRX M3	M3	7	1,5	0,5	1,5	3	1	-
01GRAX	GRX M4	M4	9	2,5	0,8	6	12	1	√
01GRBX	GRX M5	M5	12	3	0,9	7	13	1	√
01GRCX	GRX M6	M6	14	3,5	1	9	15	2	√
01GRDX	GRX M8	M8	16	5	1,5	20	35	4	√
01GREX	GRX M10	M10	19	6	1,7	25	45	7	-
01GRFX	GRX M12	M12	22	8	2,5	35	60	10	-
01GRPX	GRX M16	M16	24	10	3,5	65	110	24	-
01GRNX	GRX M20	M20	30	12	4,5	80	160	43	-

### Material

Threaded body in stainless steel AISI 303. Polished and tempered stainless steel ball.

### Package

M3/M4/M5/M6/M8: 25 - 100 - 200 pcs.

M10/M12/M16/M20: 10 - 50 - 100 pcs.