


Oil level sight

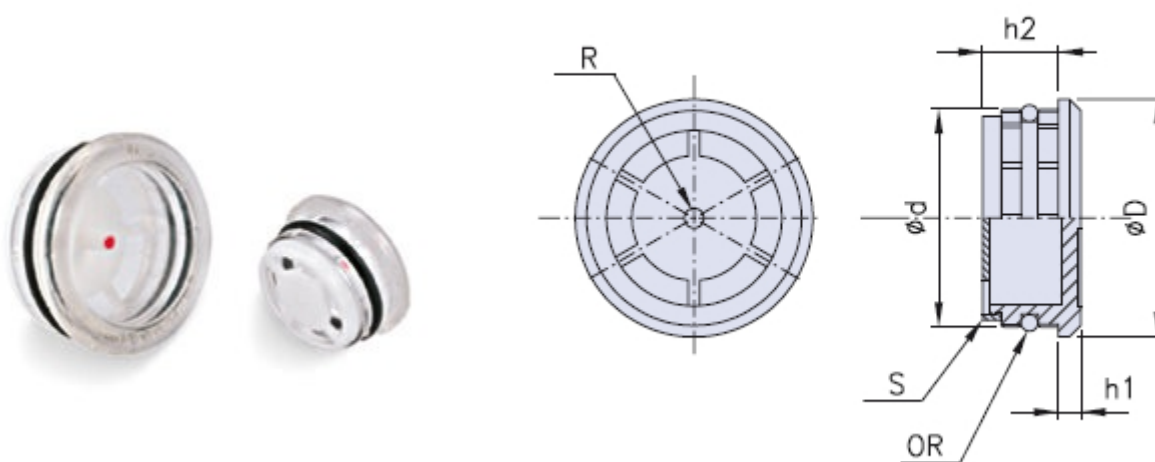

R = Red indicator point
S = Contrast screen

Code	Dimensions					Stock
	Ø	D	d	h1	h2	
01SLP-17	17	18	10	3	7	-
01SLP-20	20	24	14	4	10	-
01SLP-26	26	30	20	4	11,5	-
01SLP-32	32	36	24	4	13	-
01SLP-38	38	42	30	4	14	-
01SLP-40	40	44	32	4	14	-

Material

Special transparent polyamide resin indicator which provides optimal mechanical resistance performances and a high strength against chemical agents, oils, gasoline, fuel and a variety of solvents.
Synthetic rubber (NBR) 70 Shore O-Ring.

Description

Press-fit oil level indicator. Oil resistant with O-Ring.

Assembly

Press-fit assembly on holes of the requested diameter, with thickness over 5 mm. and tolerance of the diameter ± 0.1 with an acceptance chamfer of $1/45^\circ$.

Notes

We suggest applications on tanks without internal pressure. Avoid contact with alcohol-based solutions, detergents containing alcohol in general, anti-freeze liquids at high temperatures and hot water over 80°C .

Package

1 - 50 - 100 pcs.