


Oil fill plug

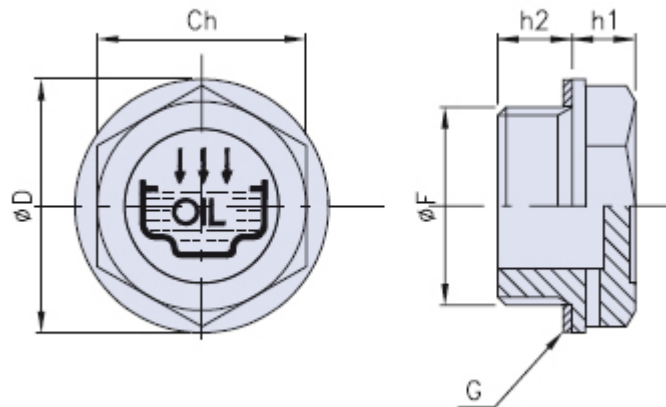

G = Fiber seal

Code	Dimensions						Nm	Stock
	F	Ch	D	h1	h2			
01TCN-14	G 1/4"	17	19,5	9	7	5	-	
01TCN-38	G 3/8"	18	22	10	7,5	8	-	
01TCN-12	G 1/2"	24	28	11	7,5	9	-	
01TCN-34	G 3/4"	30	34	11	9	11	-	
01TCN-1	G 1"	35	42	12	10,5	20	-	
01TCN-114	G 1 1/4"	42	51	13,5	12	-	-	
01TCN-112	G 1 1/2"	50	58	16	10	-	-	
01TCN-2	G 2"	64	74	16	12	-	-	
01TCN-10.15	M 10x1.5	18	22	9	7	5	-	
01TCN-12.15	M 12x1.5	18	22	9	7	5	-	
01TCN-14.15	M 14x1.5	17	19,5	9	7	5	-	
01TCN-16.15	M 16x1.5	18	21	10	7,5	6	-	
01TCN-18.15	M 18x1.5	21	26	10	7,5	7	-	
01TCN-20.15	M 20x1.5	24	28	10	8	8	-	
01TCN-22.15	M 22x1.5	24	28	11	8	10	-	
01TCN-40.15	M 40x1.5	42	52	13	10	-	-	

Material

Plug made from thermoplastic material (Polyamide 66) ensuring high mechanical resistance at both low and high temperatures. Dimensional stability and shock resistance. Flat asbestos-free fiber seal.

Description

Hex head threaded plug.

Colour

Black. Red also available for suitable quantities.

Notes

The plugs are supplied, as standard equipment, with UNI oil fill graphic symbol and OIL text.

Package

1 - 50 - 100 pcs.