
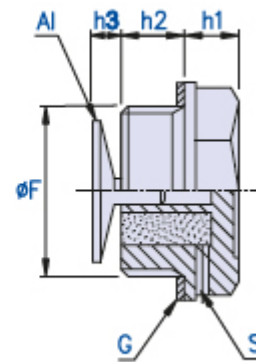


Oil fill plug with breather and anti-splash disc



Al = Anti-splash disc
G = Seal
S = Breather hole

Code	Dimensions							Nm	Stock
	F	Ch	D	h2	h1	h3			
01TCSA-14	G 1/4"	17	19,5	9	7	3	5	-	
01TCSA-38	G 3/8"	18	22	10	7,5	3	8	-	
01TCSA-12	G 1/2"	24	28	11	7,5	3	9	-	
01TCSA-34	G 3/4"	30	34	11	9	4	11	-	
01TCSA-1	G 1"	35	42	12	10,5	4	20	-	
01TCSA-114	G 1 1/4"	42	51	13,5	12	4	-	-	
01TCSA-14.15	M 14x15	17	19,5	9	7	3	5	-	
01TCSA-16.15	M 16x15	18	21	10	7,5	3	6	-	
01TCSA-18.15	M 18x15	21	26	10	7,5	3	7	-	
01TCSA-20.15	M 20x15	24	28	10	8	3	8	-	
01TCSA-22.15	M 22x15	24	28	11	8	3	10	-	

Material

Plug made from thermoplastic material (Polyamide 66) ensuring high mechanical resistance at both low and high temperatures, dimensional stability and shock resistance. Asbestos-free flat fiber seal.

Description

Hex-headed oil fill plug with breather and anti-splash disc.

The anti-splash disc, press-fitted under the thread, protects the breather hole against possible oil splashes. The breather hole is located laterally on the hex head with diam. from 2 to 3,5 mm.

Colour

Black.

Notes

The plugs are supplied, as standard equipment, with OIL text.

Package

1 - 50 - 100 pcs.