


## Extended breather plug with built-in labyrinth



G = Seal  
S = Breather hole

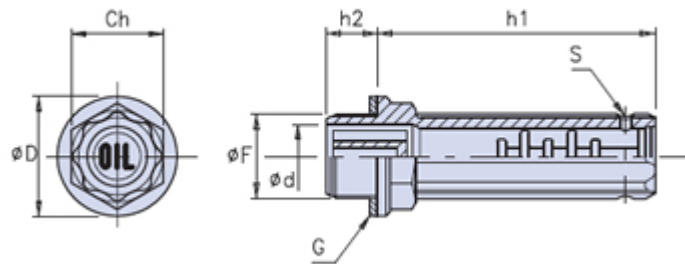

Code	Dimensions						Stock
	F	Ch	D	d	h1	h2	
01TK-14	G 1/4"	18	20	9	55	12	-
01TK-38	G 3/8"	19	20	12	60	12	-
01TK-12	G 1/2"	22	28	15	65	12	-
01TK-16.15	M 16x15	19	22	12	60	12	-
01TK-18.15	M 18x15	19	22	12	60	12	-

### Material

Plug made from thermoplastic material (Polyamide 66) ensuring high mechanical resistance at both low and high temperatures. Dimensional stability and shock resistance. Flat washer fiber seal, asbestos-free.

### Description

Threaded breather plug with extended knurled, cylindrical grip.

Designed for oil chambers where there are significant oil splashes and a consequent danger of oil overflow from the breather hole (diam 2.5 mm).

The combined action of the internal anti-splash fins and the breather hole, located at the top of the plug, prevents the overflow of liquids.

### Colour

Black.

### Notes

The plugs are supplied, as standard equipment, with OIL text.

### Package

1 - 50 - 100 pcs.