


## Metal plug with magnet

**METAL**

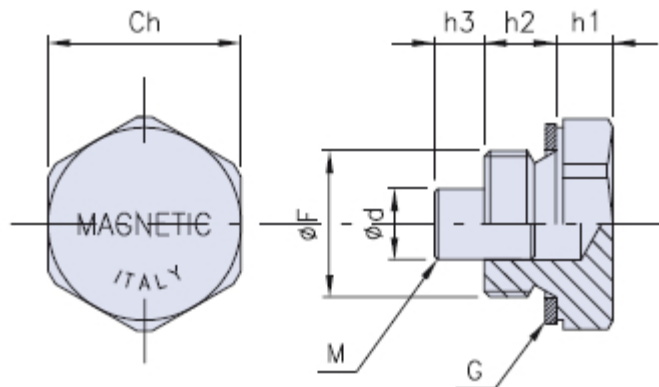

G = Fiber seal  
M = Magnet

Code	Dimensions						Stock
	F	Ch	d	h1	h2	h3	
01TMA-14	G 1/4"	18	5	7	10	6	-
01TMA-38	G 3/8"	22	8	7	10	7	-
01TMA-12	G 1/2"	27	10	8	10	7	-
01TMA-34	G 3/4"	34	13	8	10	7	-
01TMA-1	G 1"	40	13	8	14	7	-

### Material

Aluminium 11S plug.  
Asbestos-free, flat seal aluminium washer available as an option.

### Description

Hex head drain threaded plug.  
Pressed-in ferrite cylindrical magnet, located in the special base under the threaded part.  
The assembly of the plug to the bottom of the oil chamber or the tanks enables, besides the drainage, the collection of ferrous particles which are present in the oil, thus allowing an ideal lubrication.

### Notes

The plugs are supplied with text "MAGNETIC", as standard equipment.

### Package

TMA-34/1: 50 pcs.  
TMA-14/38/12: 100 pcs.