


Oil drain plug

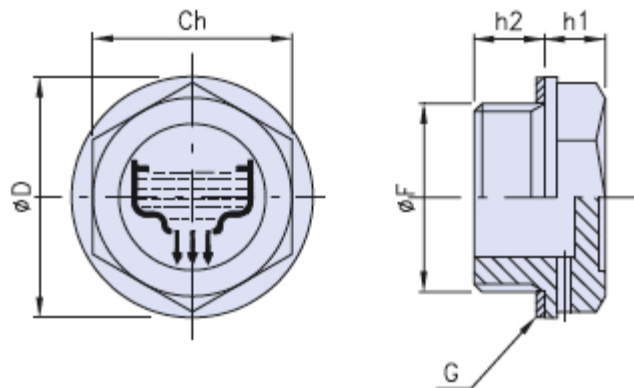

G = Fiber seal

| Code | Dimensions | | | | | | Nm | Stock |
|-------------|------------|----|------|------|------|----|----|-------|
| | F | Ch | D | h2 | h1 | | | |
| 01TSN-14 | G 1/4" | 17 | 19,5 | 9 | 7 | 5 | - | |
| 01TSN-38 | G 3/8" | 18 | 22 | 10 | 7,5 | 8 | - | |
| 01TSN-12 | G 1/2" | 24 | 28 | 11 | 7,5 | 9 | - | |
| 01TSN-34 | G 3/4" | 30 | 34 | 11 | 9 | 11 | - | |
| 01TSN-1 | G 1" | 35 | 42 | 12 | 10,5 | 20 | - | |
| 01TSN-114 | G 1 1/4" | 42 | 51 | 13,5 | 12 | - | - | |
| 01TSN-112 | G 1 1/2" | 50 | 58 | 16 | 10 | - | - | |
| 01TSN-2 | G 2" | 64 | 74 | 16 | 12 | - | - | |
| 01TSN-14.15 | M 14x1.5 | 17 | 19,5 | 9 | 7 | 5 | - | |
| 01TSN-16.15 | M 16x1.5 | 18 | 21 | 10 | 7,5 | 6 | - | |
| 01TSN-18.15 | M 18x1.5 | 21 | 26 | 10 | 7,5 | 7 | - | |
| 01TSN-20.15 | M 20x1.5 | 24 | 28 | 10 | 8 | 8 | - | |
| 01TSN-22.15 | M 22x1.5 | 24 | 28 | 11 | 8 | 10 | - | |
| 01TSN-40.15 | M 40x1.5 | 42 | 52 | 13 | 10 | - | - | |

Material

Plug made from thermoplastic material (Polyamide 66) ensuring high mechanical resistance at both low and high temperatures. Dimensional stability and shock resistance.

Flat asbestos-free seal.

Description

Threaded plug with hex screw.

Colour

Black.

Red also available for suitable quantities.

Notes

The plugs are supplied, as standard equipment, with UNI oil drain graphic symbol.

Package

1 - 50 - 100 pcs.