


Chaîne à maillon décomposable avec entretoises fixées avec vis autotaraudées à pas double

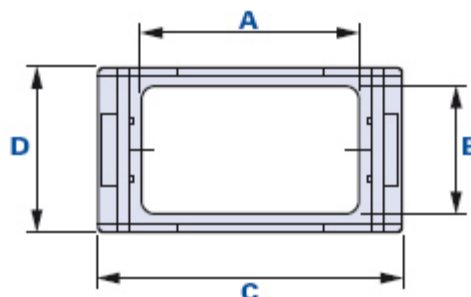

SP = SANS PRÉ-CHARGE

CP = AVEC PRÉ-CHARGE

20 maillons ~ 1 m (1.000 mm)

| Code | Description | Dimensions | | | | | | Poids grammes | Stock | |
|-------------|------------------|------------|----|----|----|----|----|---------------|-------|---|
| | | A | B | C | D | F | P | | | R |
| 01585AR50 | 585A/30 R.50 SP | 30 | 24 | 54 | 35 | 33 | 50 | 50 | 60 | - |
| 01585AR60 | 585A/30 R.60 SP | 30 | 24 | 54 | 35 | 33 | 50 | 60 | 60 | - |
| 01585AR95 | 585A/30 R.95 SP | 30 | 24 | 54 | 35 | 33 | 50 | 95 | 60 | - |
| 01585AR140 | 585A/30 R.140 SP | 30 | 24 | 54 | 35 | 33 | 50 | 140 | 60 | - |
| 01585AR190 | 585A/30 R.190 SP | 30 | 24 | 54 | 35 | 33 | 50 | 190 | 60 | - |
| 01585BR50 | 585B/45 R.50 SP | 45 | 24 | 70 | 35 | 48 | 50 | 50 | 64 | - |
| 01585BR60 | 585B/45 R.60 SP | 45 | 24 | 70 | 35 | 48 | 50 | 60 | 64 | - |
| 01585BR95 | 585B/45 R.95 SP | 45 | 24 | 70 | 35 | 48 | 50 | 95 | 64 | - |
| 01585BR140 | 585B/45 R.140 SP | 45 | 24 | 70 | 35 | 48 | 50 | 140 | 64 | - |
| 01585BR190 | 585B/45 R.190 SP | 45 | 24 | 70 | 35 | 48 | 50 | 190 | 64 | - |
| 01585CR50 | 585C/60 R.50 SP | 60 | 24 | 84 | 35 | 63 | 50 | 50 | 72 | - |
| 01585CR60 | 585C/60 R.60 SP | 60 | 24 | 84 | 35 | 63 | 50 | 60 | 72 | - |
| 01585CR95 | 585C/60 R.95 SP | 60 | 24 | 84 | 35 | 63 | 50 | 95 | 72 | - |
| 01585CR140 | 585C/60 R.140 SP | 60 | 24 | 84 | 35 | 63 | 50 | 140 | 72 | - |
| 01585CR190 | 585C/60 R.190 SP | 60 | 24 | 84 | 35 | 63 | 50 | 190 | 72 | - |
| 01585AR50C | 585A/30 R.50 CP | 30 | 24 | 54 | 35 | 33 | 50 | 50 | 60 | - |
| 01585AR60C | 585A/30 R.60 CP | 30 | 24 | 54 | 35 | 33 | 50 | 60 | 60 | - |
| 01585AR95C | 585A/30 R.95 CP | 30 | 24 | 54 | 35 | 33 | 50 | 95 | 60 | - |
| 01585AR140C | 585A/30 R.140 CP | 30 | 24 | 54 | 35 | 33 | 50 | 140 | 60 | - |
| 01585AR190C | 585A/30 R.190 CP | 30 | 24 | 54 | 35 | 33 | 50 | 190 | 60 | - |

| | | | | | | | | | | |
|--------------------|------------------|----|----|----|----|----|----|-----|----|---|
| 01585BR50C | 585B/45 R.50 CP | 45 | 24 | 70 | 35 | 48 | 50 | 50 | 64 | - |
| 01585BR60C | 585B/45 R.60 CP | 45 | 24 | 70 | 35 | 48 | 50 | 60 | 64 | - |
| 01585BR95C | 585B/45 R.60 CP | 45 | 24 | 70 | 35 | 48 | 50 | 95 | 64 | - |
| 01585BR140C | 585B/45 R.140 CP | 45 | 24 | 70 | 35 | 48 | 50 | 140 | 64 | - |
| 01585BR190C | 585B/45 R.190 CP | 45 | 24 | 70 | 35 | 48 | 50 | 190 | 64 | - |
| 01585CR50C | 585C/60 R.50 CP | 60 | 24 | 84 | 35 | 63 | 50 | 50 | 72 | - |
| 01585CR60C | 585C/60 R.60 CP | 60 | 24 | 84 | 35 | 63 | 50 | 60 | 72 | - |
| 01585CR95C | 585C/60 R.95 CP | 60 | 24 | 84 | 35 | 63 | 50 | 95 | 72 | - |
| 01585CR140C | 585C/60 R.140 CP | 60 | 24 | 84 | 35 | 63 | 50 | 140 | 72 | - |
| 01585CR190C | 585C/60 R.190 CP | 60 | 24 | 84 | 35 | 63 | 50 | 190 | 72 | - |

Matériau

Technopolymère à base polyamidique (PA). Résistant aux substances chimiques organiques et inorganiques telles que les huiles, les graisses, les carburants et les solvants.

Couleur

Noir avec finition satinée.